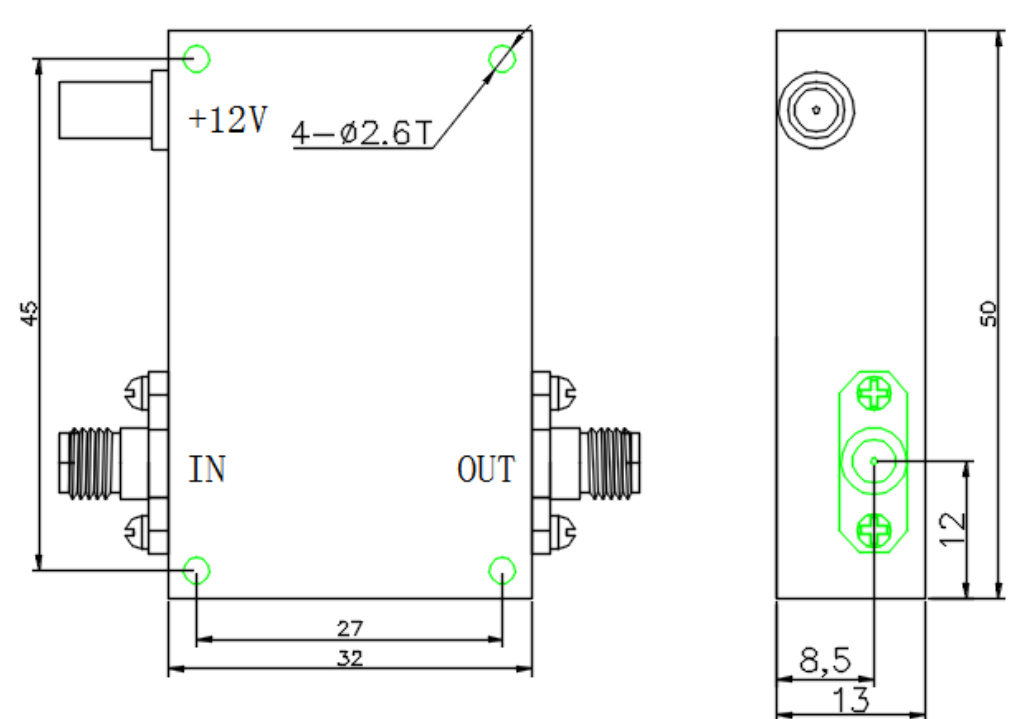


产品规格书

产品名称	低噪声放大器		规格型号	HTLNA-051203-28
技术指标	1	工作频率	50MHz~20GHz	
	2	增益	28±3dB	
	3	P-1	≥13dBm	
	4	噪声系数	≤6dB@50MHz~4GHz	
			≤3.5dB@4GHz~20GHz	
5	驻波	≤2.0		
接口形式	1	输入	SMA-K	
	2	输出	SMA-K	
	3	电源	SMB-J	
电源	1	工作电压	+12V	
	2	电流	≤150mA	
外形尺寸				
温度环境	1	工作温度	-40~+70℃	
	2	存储温度	-55~+85℃	
说明	产品附带~220V 电源适配器			